

Tendertowing systems

MOORING **M** YACHTS

X

Gleistein

Tendertowing systems


Nearshore

nearshore	FoS 3			
Tender weight	BL (to)	DynaOne	GeoTwin PES/ (DynaOne/1,4)	Tylaska
3	9	12	20	T20
4	12	12	20	
5	15	14	26	
6	18	16	28	T30
7	21	18	30	
8	24	18	30	T40
9	27	20	36	
10	30	20	36	T50
11	33	22	36	
12	36	22	36	


Offshore

offshore	FoS 5			
Tender weight	BL (to)	DynaOne	GeoTwin PES (DynaOne/1,4)	Tylaska
3	15	14	26	T30
4	20	16	28	
5	25	18	30	
6	30	20	36	T40
7	35	22	36	
8	40	24	40	T50
9	45	26	44	
10	50	28	48	
11	55	28	48	
12	60	30	48	

Tendertowing system Y

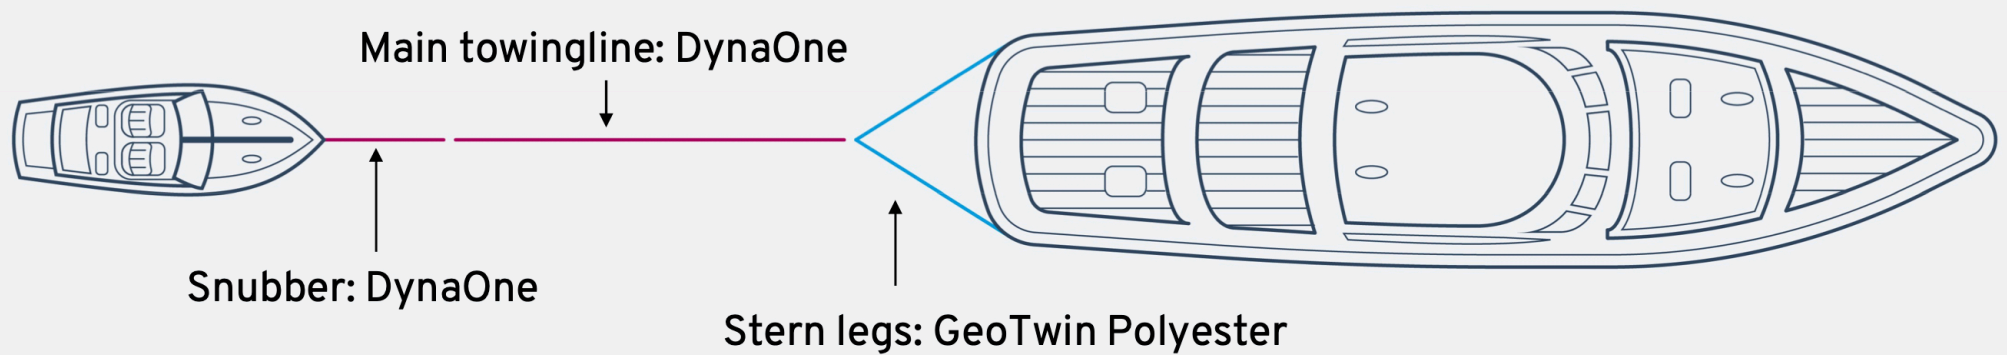

Tendertowing system Y-Y

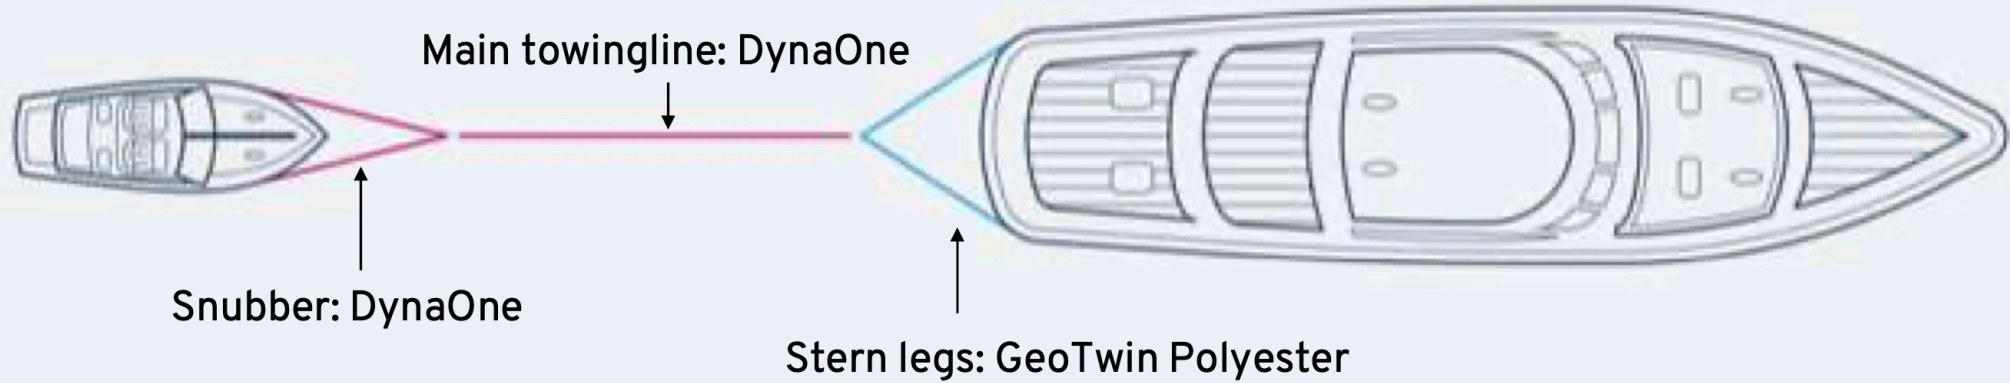

Tendertowing system


Snubber



Main Towline



Stern legs

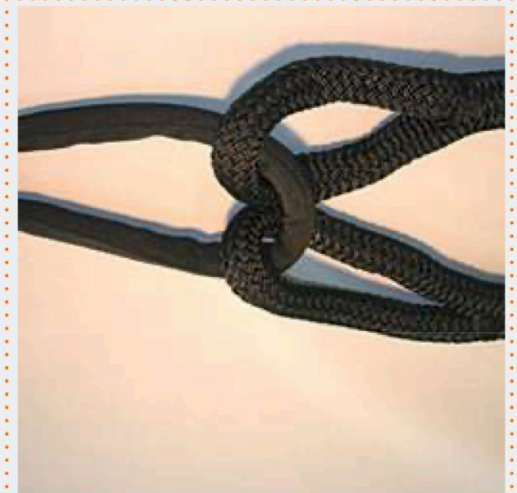

Tendertowing system


Connection Geolink



Connecting Tylaska



Connection: fixed spliced

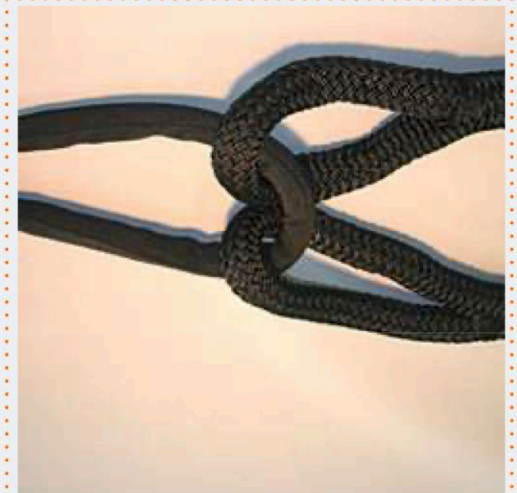

Tendertowing system

- Questionnaire
- Length of complete system: 2-3 x Yacht length
- Length Stern Bridle: 2 x beam Yacht
- Length Snubberline: 3-5m